


Compaction  
to CBR>10

### **CARRIAGEWAYS**

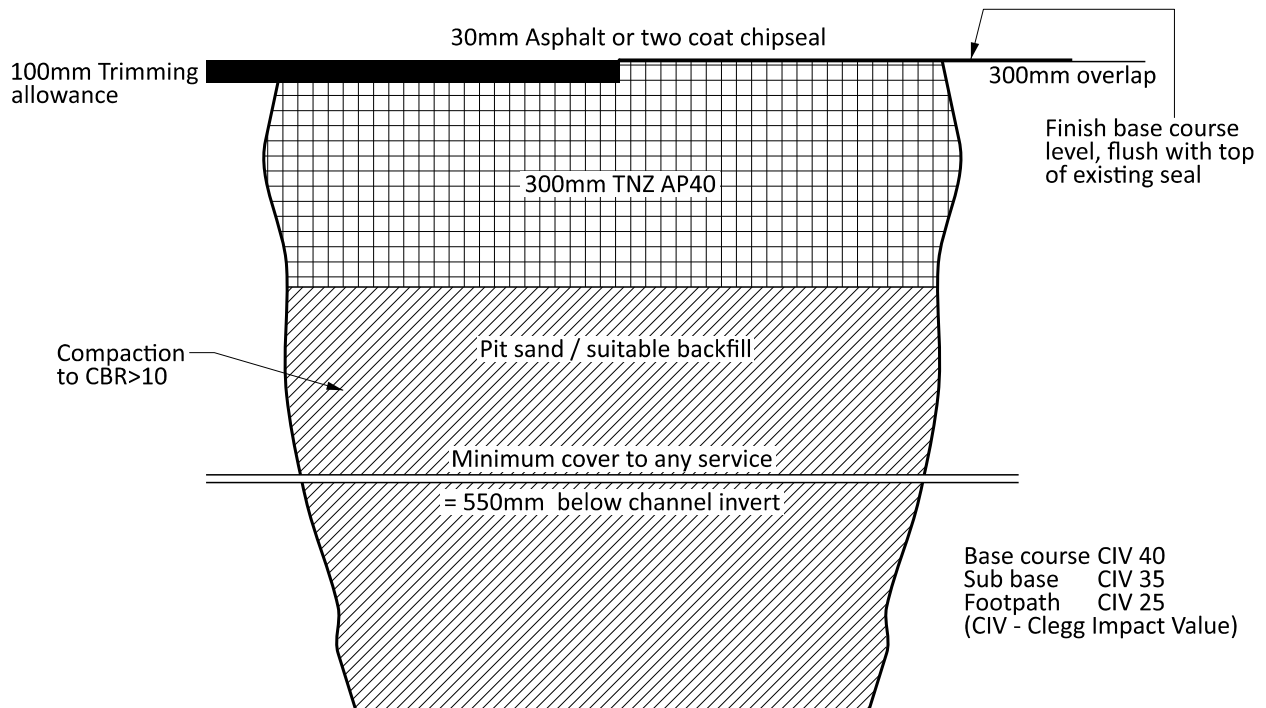

**NOTES:**

1. Minimum pavement reinstatement width to be 1000mm.
2. Sawcut, where appropriate, observing trimming allowances prior to commencing excavation.
3. Remove excavated material from site unless suitable for backfilling.
4. Place and compact backfill material in layers.
5. Place and compact metal pavement in appropriate lifts.
6. Reinstatement surfacing to required shape tolerances.
7. Carry out waterproof sealing of all asphalt trenches in carriageways.
8. Crossings to be replaced with crossings specification. See D3.3.1 & D3.3.5