


UNDER CHANNEL ACCESS DUCT DETAIL

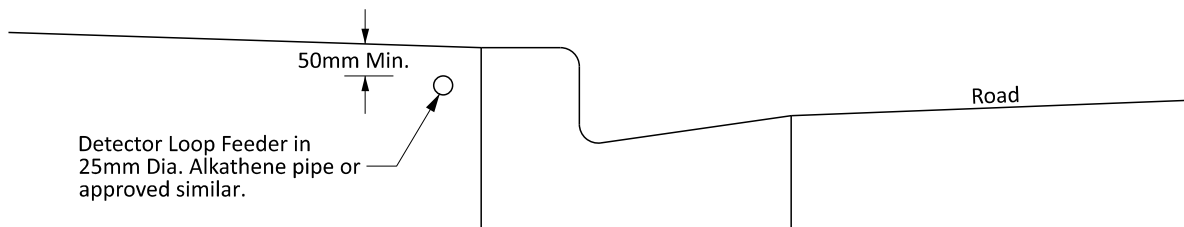

DETECTOR LOOP FOOTPATH DUCTING DETAIL

NOTES:

When installed after kerb a slot is to be cut with a concrete saw and sealed using a sealer as approved in P43 traffic signal specification.