


OVERLAY ON EXISTING CHIPSEAL SURFACE

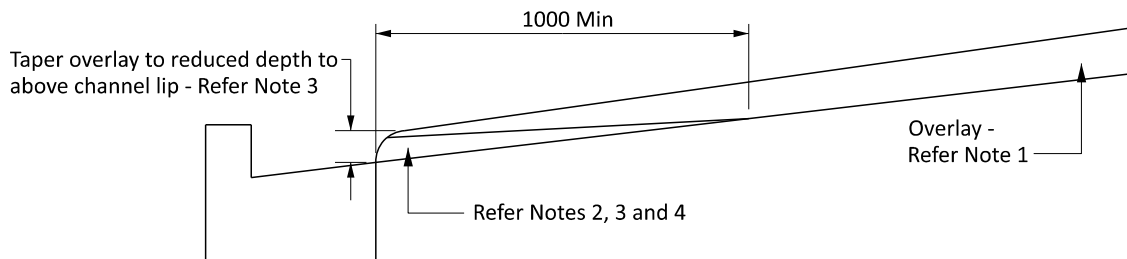

OVERLAY EDGE DETAILS WHERE EXISTING SURFACE IS PROUD OF LIP OF CHANNEL

NOTES:

1. Overlay thickness shall be the following unless specified otherwise:
 - AC Mix 10 - nominal 25mm thickness
 - OGPA (Open Graded Porous Asphalt) - nominal 30mm thickness
 - SMA - nominal 35mm thickness
2. Prior to placing overlay:
 - Mill off existing surfacing to flush with lip of Kerb and Channel
 - Seal any exposed basecourse with bitumen and G5 chip.
3. Tapering of overlay shall be made over a minimum of 1m - desirably 2m, resulting in a overlay depth of
 - 10mm for AC Mix and SMA
 - 15mm for OGPA
4. When overlay is placed adjacent to a pedestrian cutdown extra care is required to ensure that the overlay ties into the lip of the channel and does not have a vertical face.